Oricore ST66 User's Manual (www.ricco.tv)

Oricore st-66

Oricore st-66 Bluetooth Headsets gives you more freedom on the move. Pair with compatible Bluetooth mobile phones and this headset makes it easier for you to carry on with your tasks whilst making or taking a call.

Oricore ST-66 Bluetooth Headset is compliant with Bluetooth Version 2.0 specifications, and is compatible with the latest mobile phones supporting Bluetooth Headset or Handfree Profiles.

Contents

Oricore ST-66 Bluetooth headset overview……..1
Display information……..2
Getting Started……
Charging Your headset……..3
Normal Charging Time……3
Talk and Standby Time……..3
Turning Your Headset On and Off……4
Pairing Your Headset……..4-5
Using Your Headset……..5-6
Answering a Call……..5
Talk and Standby Time……5
Adjusting the Volume……5
Dialing from Your Mobile phone……6
Voice Dialing from Your Headset…… ……..6
Rejecting a call……..6
Last Number Redialing from Your Headset……...6
Music Play/Pause…… …6
Turning the built-in buzzer on and off……..6
Care and Maintenance……..7-8
Headset…… ….7
Built-in Battery……...8
Charger……8
Safety Information……9
Troubleshooting……10
Compatibility……10
Product Specifications……11

Oricore ST66 User's Manual (www.ricco.tv)

Oricore ST-66 Bluetooth Headset Overview

1. Built-in Buzzer
2. Display with backlight
3. Audio DC socket.
4. Built-in Microphone
5. Built-in Rechargeable Battery
6. Earpiece
7. Multi-function Button(MFB)
8. Charging Socket
9. Next track
10. Last track
11. Volume/Setting Button

Oricore ST66 User's Manual (www.ricco.tv)

Display Information

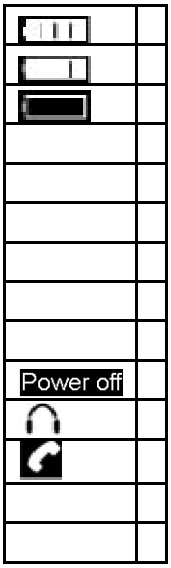

	Battery Icon(Full Capacity) Battery Icon(Full Capacity)
	Battery Icon(Half Capacity) Battery Icon(Half Capacity)
	Battery Icon(Empty/Low Capacity) Battery Icon(Empty/Low Capacity)
	Pairing status, press and hold MFB for 5-6 seconds Pairing status, press and hold MFB for 5-6 seconds
	Pairing is completed Pairing is completed
	Turn on Turn on
	When being turned on, the headset will connect with last device that you have matched before and right now the screen shows "connecting" When being turned on, the headset will connect with last device that you have matched before and right now the screen shows "connecting"
	If haven't been connected, it will shows "Ready" If haven't been connected, it will shows "Ready"
	Turn off Turn off
	AV service will show note icon. AV service will show note icon.
	Connected with headset will show headset icon Connected with headset will show headset icon
	On the phone, it shows call icon On the phone, it shows call icon
	charging charging
	Charging finished Charging finished
	When dialing, the display shows "Outgoing call"
	When a call coming in, the display shows "Incoming call"

Oricore ST66 User's Manual (www.ricco.tv)

Getting Started

To use your Oricore ST-66 Bluetooth Headset, please follow the steps below:

1. Ensure your headset is fully charged.
2. Pair your charged headset with a Bluetooth-enabled mobile phone.

Charging Your Headset

The headset comes with a built-in rechargeable battery. Prior to using the headset for the first time, it is recommended to fully charge the battery first.
Insert the charger plug into the headset's charging socket (refer to figure3) and plug the mains charger to an AC wall outlet. The battery icon will be displayed when charging.
IMPORTANT: Charging indication will be delayed for a few seconds if the headset has not been used for a long time or the battery is drained.
Normal Charging Time If takes about two hours to fully charge the battery. When the battery is fully charged, the battery icon will stay on and indicate "charging complete". Unplug the mains charger from the AC wall outlet and the charger plug form the headset.

Talk and Standby Time
A fully charged battery can offer up to 7 hours of talk time and up to 180 hours of standby time. When there are no calls the headset should remain turned on in standby mode.

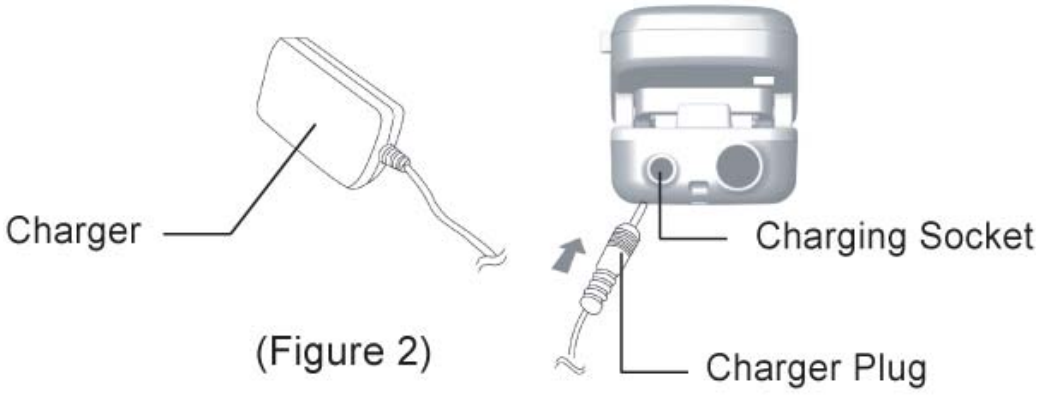

(Figure 2)

Turning Your Headset On and Off **Turning on the Headset**

Press and hold the MFB (see figure 1) for 3 seconds until you see the display showing"power on". IMPORTANT: Press the MFB again when you want to turn on the headset to re-activate pairing but ensure the connection between the headset and the mobile phone is resumed. For pairing, please refer to "Pairing Your Headset".
Turning off the Headset Press and hold the MFB for 5 seconds until it shows "power off". IMPORTANT: To disconnect the Bluetooth connection, press the headset's MFB firmly to turn it off. If you do not want to use the headset for a while, we advise you turn off the Bluetooth function on your mobile phone as well.

Pairing Your Headset The headset works with Bluetooth-enabled phones only. Prior to using and pairing your headset for the first time, please check if your mobile phone is Bluetooth-enabled. This information will normally feature on the packaging or user guide that is provided with your mobile phone. The pairing instructions for typical Bluetooth –enabled mobile phone are explained on the next page. The headset pairing procedure may vary depending on the setting of your mobile phone. Please contact the manufacturer of your mobile phone or its agent for further information.

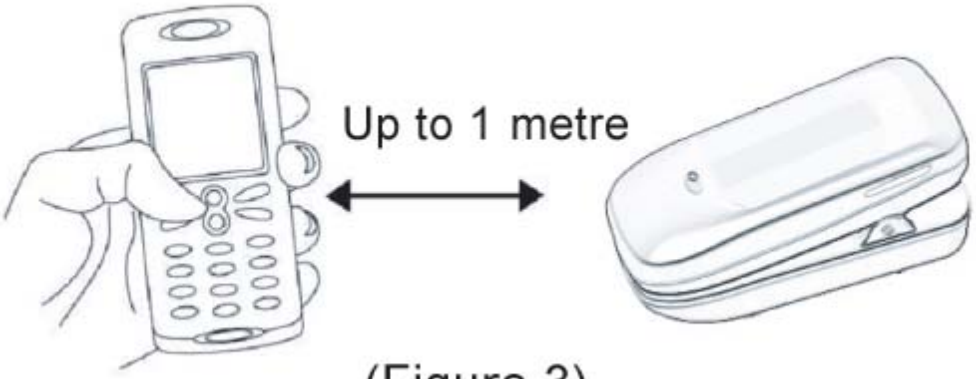

(Figure 3)

Pairing Your Headset

1. Place the headset and the mobile phone where they are no more than one meter apart.
2. Ensure the headset is off.(The display is unlit)
3. Press and hold the MFB for 5 seconds until the headset's display showing " pairing"
4. Activate your mobile phone's Bluetooth function. Please refer to your mobile phone user guide for details.
5. Set the mobile phone to search for Bluetooth devices within the one meter range, as instructed in the mobile phone user guide, and select ST-66"from the list.
6. Enter the pre-programmed passkey"0000" and press "ok" to pair your headset and mobile phone. When the pairing is completed, the display of the headset will show "connected" and followed by a beep.
7. Go back to your mobile phone's main menu.
8. For some mobile phone, when they are re-started, the headset will be connected with the mobile phone automatically.

Using Your Headset

Answering a Call

When there is an incoming call, you will hear the beep through the earpiece. Press the MFB once to accept the call via your mobile phone in the normal way.

Ending a Call

Press the MFB once to end your call. Or end the call via your mobile phone in the normal way.

Adjusting the volume

When you are on the phone or listening to the music, press the volume button repeatedly until you reach the desired volume level. The headset's display will show a 7-tiered audio level. The volume may be affected by the volume setting of the caller's phone as well. Re-adjust the listening volume again when necessary.

Silence the call:

When during the calling, double-click MFB key, the microphone mute. (Your receivers can not hear your voice.) Please double-click MFB recover.

Clear paring: hold volume + key and next tracking key five seconds, the screen will show" Headset Reset", the headset turn off .When turn on the headset next time, need pairing again.

Using Your Headset

Dialing from Your Headset

Simply make calls on your mobile phone in the normal way. Press MFB to cancel this call.

Voice Dialing form Your Headset

If you mobile phone is equipped with voice dialing function, simply press the MFB on your headset, and please say the voice tag when you hear a beep

IMPORTANT: For voice dialing, you must record the voice tag (the person's name) into your mobile phone before using the voice dialing function on the headset. Please refer to your mobile phone's user guide on how to record the voice tag.

Rejecting a Call

To reject an incoming call, quickly press MFB 2 times

Last Number Redialing from Your Headset

Press the MFB on your headset twice.

IMPORTANT: The above functions are only applicable to mobile phones with Bluetooth Headfree Profile. Function Varies depending on the mobile phone model you have. Please refer to your mobile phone user guide for additional information.

Play/Pause Music

The music play list will be started by pressing the MFB button on the condition of the headset is connected with the stereo mobile phone. After the starting, press the MFB a time, it will turn to pause. And when being connected with the AV Source, the functions of the MFB are music play and pause.

Last track / next track key. When using a mobile phone supporting A2DP profile, please have a short press of the Last/ next track key respectively and you will hear the right music.

Turning the built-in buzzer on and off

Turning on the built-in buzzer

Press and hold the next track key for 5 seconds until you hear a long beep.

Notes: 1.The built-in buzzer is set to be "on ".

2. The built-in buzzer will not sound when you are using a mobile phone supporting A2DP profile, but you will hear a sound noting the incoming call from the headsets. However, when using a single track mobile phone, you'll found the

built-in buzzer recover to note you with beep.

Turning off the built-in buzzer

Press and hold the next track key for 5 seconds until you hear two short beeps.

Now, when there is an incoming call, the ringing tone will only be heard through the earphone.

Care and Maintenance

Headset

·Consider turning your headset off before placing it in your pocket or bag. If the MFB is accidentally activated, your mobile phone may place an unintended call.

·Do not expose the headset to liquid, moisture or humidity as it is not waterproof.

·Do not use abrasive cleaning solvents to clean the headset.

·Do not expose the headset to extreme temperature conditions. The best storage temperature range is from-10℃+.

to +60℃ , otherwise the life of the headset will be influenced.

·Do not dispose of the headset in a fire as it this may result in an explosion.

·Do not bring your headset into contact with sharp objects as this will cause scratches and damage.

·Do not stick anything inside the headset as this may damage the internal components.

·Do not attempt to disassemble the headset as it does not contain serviceable components.

·If you do not use the headset for long periods, be sure to store it in a dry place, free from extreme temperature conditions and dust.

Built-in Battery

·Do not attempt to replace the headset's battery yourself as it is built into the headset and is non-changeable.
·Charge the battery in accordance with the instructions supplied with this user guide.

Charging

·Only use the manufacturer supplied charger when charging the headset.
·Do not disassemble the charger as it may expose you to dangerous voltages and other risks. Incorrect reassembly can cause electric shocks when the headset is subsequently used.
·Do not use the charger outdoors or in damp areas.
·Only charge the headset's built-in battery in accordance with the instructions contained in this user guide.
·Avoid charging the headset in extreme temperature conditions.

Safety Information

·Check local laws regarding the use of mobile phones and headsets while driving. If you use the headset while driving, ensure your attention and focus remains on the road and you drive in a responsible and safe manner.
·Never allow children to play with the headset –small parts may be a choking hazard.
·Observe all signs that require an electrical device or RF radio product to be switched off in designated areas. These could include hospitals, blasting areas, and potentially explosive environments.
·Turn off your headset prior to boarding an aircraft. Do not use your headset in an aircraft.
·Never mount or store your headset over any air bag deployment area as serious injury may result when the air bag deploys.
·No not open or mutilate the built-in battery.
·Dispose of batteries according to local regulations. Do not dispose as household waste.

Troubleshooting

If you are unable to connect your headset and mobile phone, please try the following:
·Ensure your headset is turned off and is properly charged.
·Ensure the headset is paired with your mobile phone.
·Ensure your mobile phone's Bluetooth feature is activated. Please refer to your mobile phone user guide for specific instruction.
·Ensure the headset is within a 10 meter range of your mobile headset and there are no obstructions, such as walls or other electronic devices in between.

If the above steps do not solve your problem, please recharge the headset and remove your mobile phone battery for a short time.

Compatibility Works with all Bluetooth-enabled phones and PDAs.

To know more our products information, please visit our website: http://www.oricore.com

Product specifications

Version:	2.0
Bluetooth profile supported：	headset，handsfree ，A2DP and AVRCP
Range of frequency：	2.480ghz spectrum
Dimension：	51*23*23 mm
Nominal charging time：	within 2 hours
Talk time：	up to 7 hours
Music playing time：	up to 4 hours
Stand-by time：	up to 180hours
Weight：	17.5 grams